

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

**SPECIFICATIONS**

Current Rating:

3 Amp

Insulator Resistance:

1000 Megohms Min.

Contact Resistance:

20 m ohms Max.

Dielectric Withstanding:

AC 500V/Minute

Operating Temperature:

-40° ~ +105°C  $\triangle A$

Contact Material:

Brass  $\triangle B$


Insulator Material:

Polyester UL94V-0




Color: Black  $\triangle C$

Finish:

Plated with 30u" Gold overall on pin  $\triangle D$

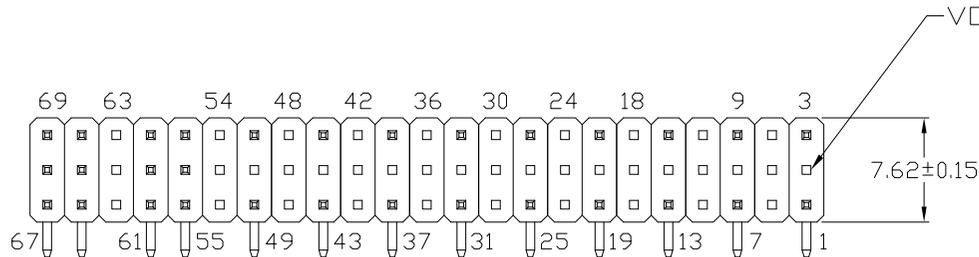

VOID No.2,4,5,6,8,10,11,12  
 No.14,16,17,18,20,22,23  
 No.24,26,28,29,30,32  
 No.,34,35,36,38,40,41  
 No.42,44,46,47,48,50  
 No.,52,53,54,61,62,63

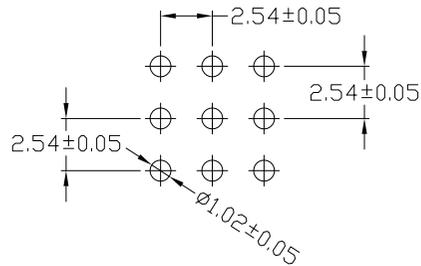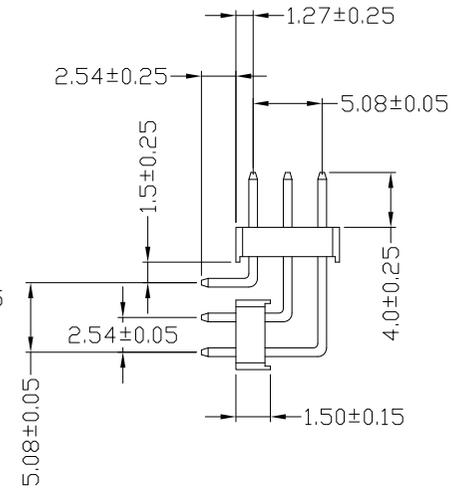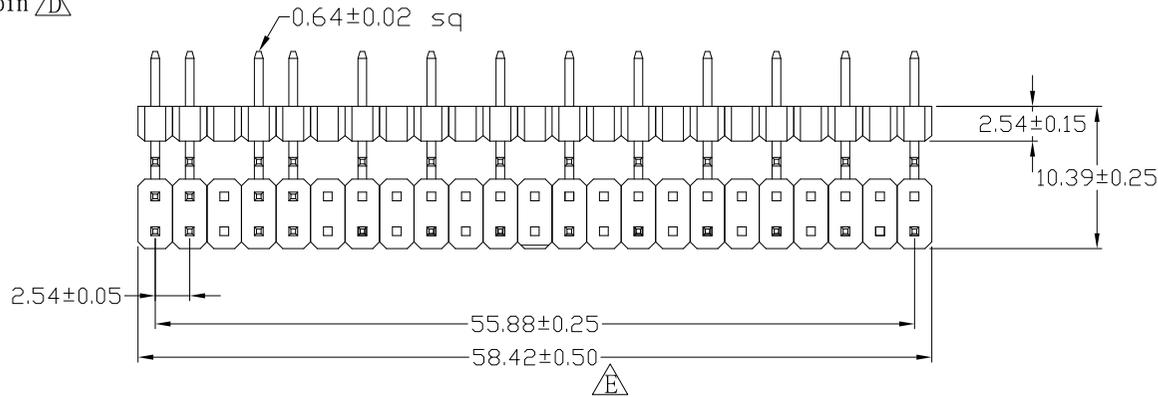

RECOMMENDED P. C. B. LAYOUT

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm  METRIC X. = ±0.2 .X = ±0.1 .XX = ±0.05 .XXX = ±0.03	DRAW:	DATE:	TITLE:
	TONY	01/02/05	I/O CONN 2.54 mm PIN HEADER
	CHECK:	APPROVE:	MODEL CODE:
	CHARLIE	MARK	PHPB-26R64369-30G-62E (44B714750-006R01)
			<b>誠州電子有限公司</b> <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	Q'TY
----	-------------	------