

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:

1.0 Amp

Insulator Resistance:

1000 Megohms min.

Contact Resistance:

25 m ohms max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-40°C to +105°C

Contact Material:

Brass

Insulator Material:

High Temperature Thermoplastic

+Glass Fibre UL94V-0

Color: Black

Finish:

Gold, Tin or Duplex plated




Standard: Gold flash all over

Duplex plating:


Gold plated on contact area

Tin on solder area

RoHS Compliance

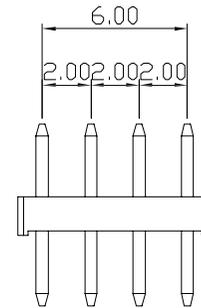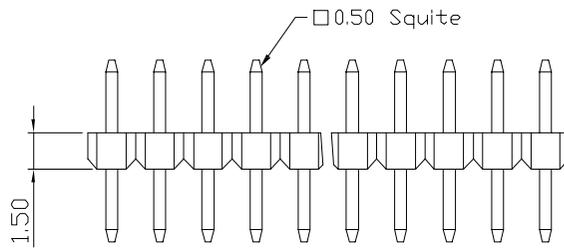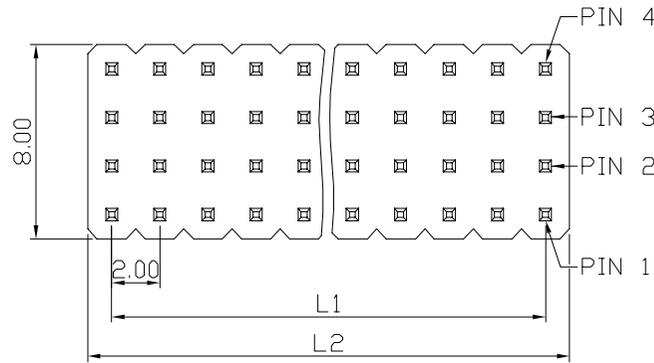

Cir-cuits	Dimension (mm)	
	L1	L2
4x2	2.00	4.00
4x3	4.00	6.00
4x4	6.00	8.00
4x5	8.00	10.00
4x6	10.00	12.00
4x7	12.00	14.00
4x8	14.00	16.00
4x9	16.00	18.00
4x10	18.00	20.00
4x11	20.00	22.00
4x12	22.00	24.00
4x13	24.00	26.00
4x14	26.00	28.00
4x15	28.00	30.00
4x16	30.00	32.00
4x17	32.00	34.00
4x18	34.00	36.00
4x19	36.00	38.00
4x20	38.00	40.00
4x21	40.00	42.00
4x22	42.00	44.00
4x23	44.00	46.00
4x24	46.00	48.00
4x25	48.00	50.00
4x26	50.00	52.00
4x27	52.00	54.00
4x28	54.00	56.00
4x29	56.00	58.00
4x30	58.00	60.00

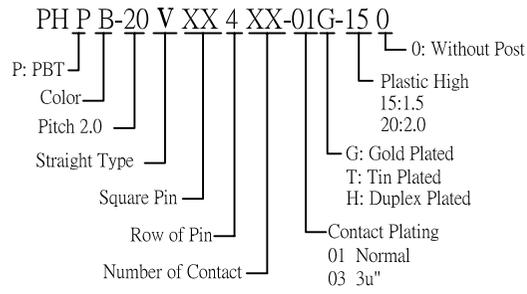

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38
.XX = ±0.25

DRAW: CHUBBY
DATE: 01/10/07
CHECK: KEVIN
APPROVE: TONY

TITLE: 2.0 Pin Header Straight Type Plastic High 1.5mm

MODEL CODE: PHPB-20VXX4-XX-XX



誠州電子有限公司
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY