



CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

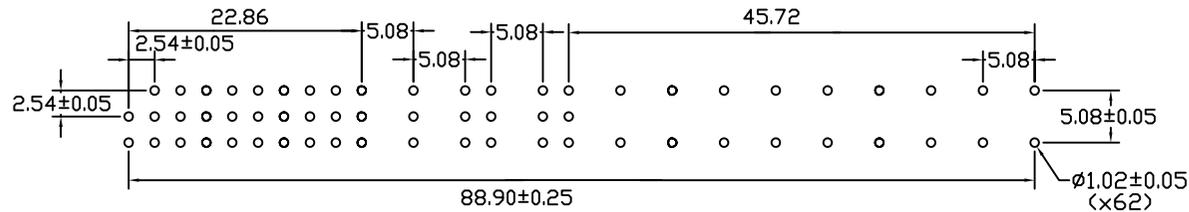



Recommended P.C.Board Hole Layout

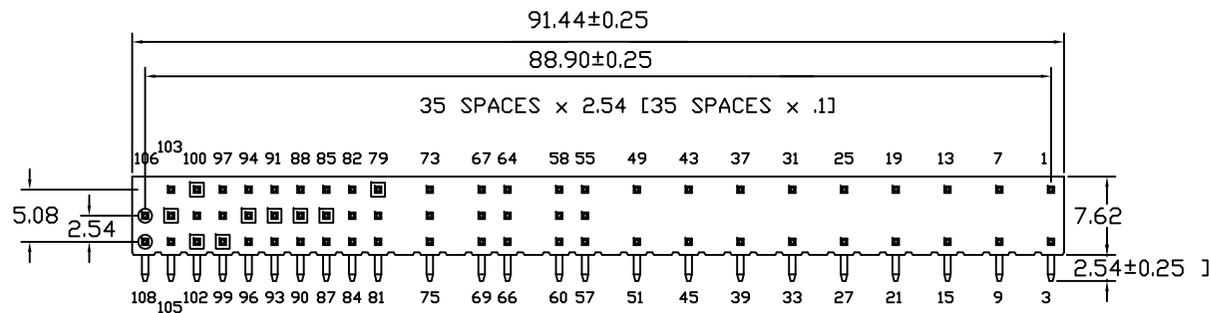

記號	POSITION	"A" DIM in mm
⊙	107,108	7.87±0.25
⊠	79,86,89 92,95,99 100,102 104	6.00±0.25
■	ALL OTHER PINS	4.06±0.25

POSITION WITH NO PIN

- 2, 32,
- 4,5,6 34,35,36
- 8, 38,
- 10,11,12 40,41,42
- 14, 44,
- 16,17,18 46,47,48
- 20, 50,
- 22,23,24 52,53,54
- 26, 61,62,63
- 28,29,30 70,71,72
- 76,77,78
- 106

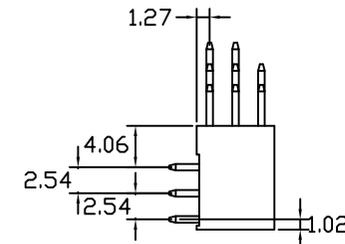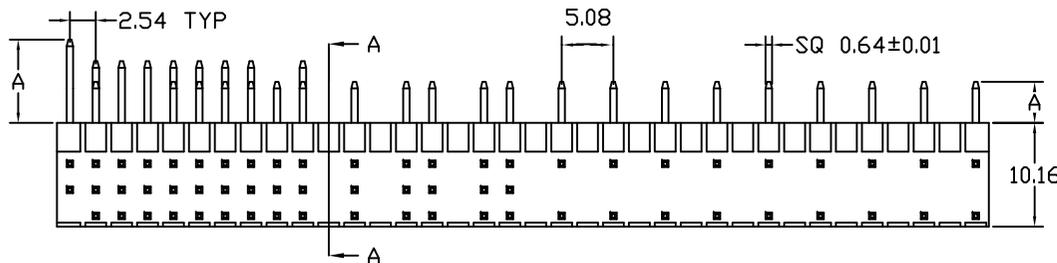


9	Withdrawal Force:50±15g W/0.64 Sq PIN
8	Insertion Force:80±15g W/0.64 Sq PIN
7	Contact: plated with 30u"thick gold in localized area and 150u"thick Tin-lead in solder area over 50u" Min. thick Nickel underplate.
6	Contact Resistance: 10m Ω Max.
5	Processing Temp Range: -65°C TO +240°C
4	Insulator Material: L.C.P(UL94V-0), Color: Black
3	Terminal Material: Copper Alloy
2	Operating Temperature: -65° to +105°C
1	Current Rating: 3 Amps/PIN
NO	<b>DESCRIPTION</b>

UNLESS OTHERWISE SPECIFIED  
SURFACE FINISH ALL OVER TOLERANCES

INCH	METRIC
X. =±0.0079	X. =±0.2
.X =±0.0039	.X =±0.1
.XX =±0.0020	.XX =±0.05
.XXX =±0.0012	.XXX =±0.03

DRAW: <b>FEMMY</b>	DATE: <b>08/20/01</b>
CHECK: <b>CHARLIE</b>	APPROVE: <b>MARK</b>



**TITLE:**  
I/O CONN 2.54 mm PIN HEADER

**MODEL CODE:** PHPB-26R64369-30G-62F (44B714750-008R01)

 **誠州電子有限公司**  
Sincere State Electronics Co.,Ltd.