
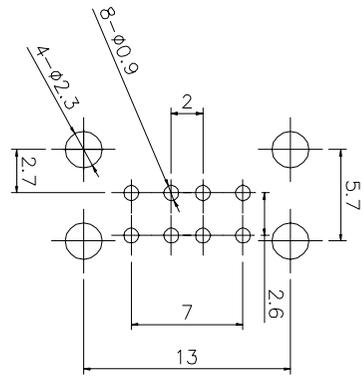
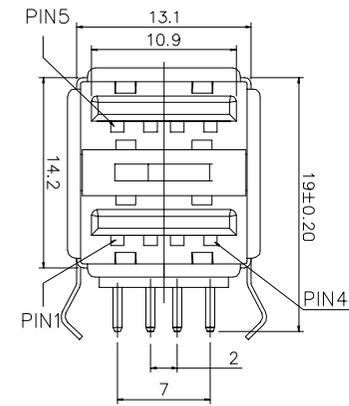


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:


DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

SPFCIFICATIONS

Current Rating: 1.0 Amp
Voltage Rating: 30V AC/DC
Insulator Resistance: 1000 M ohm min.
Contact Resistance: 20 m ohm max.
Dielectric withstanding: AC 750V/minute
Operating Temperature: -40°C to +105°C
Contact Material: Phosphor Bronze
Insulator Material: PBT UL94V-0
Finish:
Gold plated on contact area
Tin Plated on solder Tail
Shell:Copper Alloy
Shell Plating:Nickel Plated

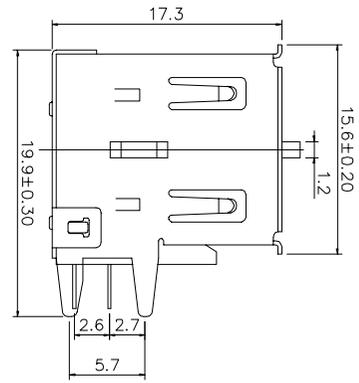

PCB LAYOUT



U560 □ - □ □ □ □ □ - □ □ □

A: A Type
B: B Type
C: 1394
D: MINI

No. OF PINS:

S10: Single port 90°
S15: Single port 180°
S20: Dual port 90°
S30: SMT

Gold Thickness
00: None
03: 3u"
05: 5u"
10: 10u"

Plating Material
G: Full Gold Plated
T: Full Tin Plated
P: Gold Plated & Tinned Tail

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC X. = ±0.38 .X = ±0.25 .XX = ±0.13	DRAW: TONY	DATE: 05/15/01	TITLE: USB A TYPE FEMALE DUAL PORT R/A
	CHECK: CHARLIE	APPROVE: TONY	MODEL CODE: U560A-08S20-XXX
			 誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	QTY
----	-------------	-----