
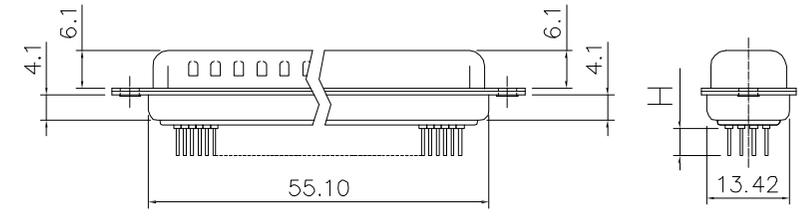
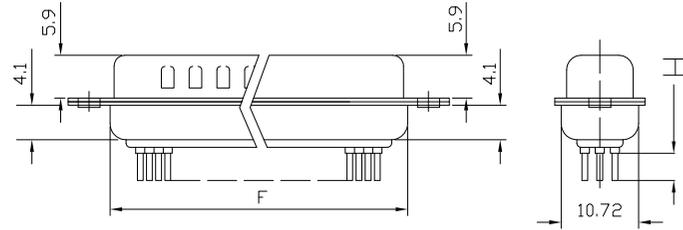
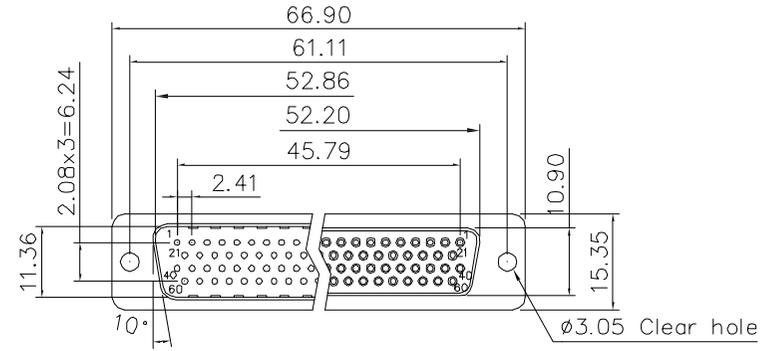


CUST. MODEL:	REF.
CUST. P/N:	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1			

RoHS Compliance

Current Rating: 1.0 Amps
Voltage Rating: 250V AC R.M.S.
Insulator resistance: 1000 Megohms Min.
Dielectric withstanding: AC/DC 1000V for 1 minute
Contact resistance: 30miliohms Megohms Max.
Operating Temperature: -55 ~ +105 °C
Contact Material: Brass
Insulator Material: PBT (UL94V-0) WHITE

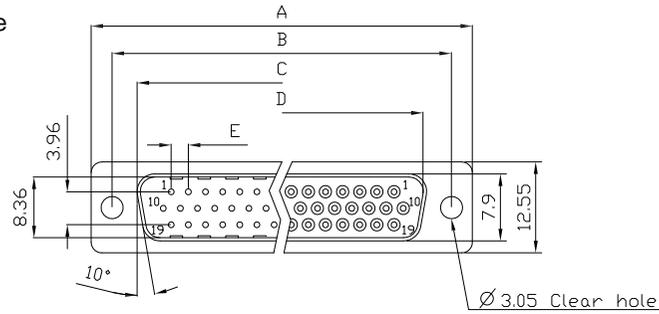

78 Pin (4 Row)

DS003-□ □ 1 □ □ □ 1 □ □ □

No. OF PINS:
15,26,44,62
78

Contact type:
1:Male,2:Female

Contact:
1:Gold flash and Tinned Tail
2:15u" Gold on contact
3:30u" Gold on contact
4:Selective Gold (Full Gold)

Position of clinch nut:
0:3.05mm clear hole
1:Riveted front shell
2:Riveted rear shell
3:Riveted boardlock

H: Option
Ex:8.0mm=800
3.4mm=340

Pin Type:
1:Machined
2:Stamped

Shell:
0:Tin
1:Ni

Color:
0:BK
1:WH

Flange Mounting Option:
0: 3.05mm clear hole
1: #4-40 threaded hole
2: #4-40 threaded hole with #4-40 unc screwlock installed
3: #4-40 threaded hole with #4-40 unc screwlock bulk-packed
4: M3 threaded hole
5: M3 threaded hole with M3 screwlock installed
6: M2.6 threaded hole
7: M2.6 threaded hole with M2.6 screwlock installed

Positions	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.14	33.32	25.50	24.66	2.29	27.70
44	53.04	47.04	38.96	38.38	2.29	41.10
62	69.32	63.50	55.42	54.84	2.41	57.30
78 (4 Row)	66.90	61.11	52.86	52.20	2.41	55.10

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.38
.XX = ±0.25

DRAW:

BEN

DATE:

01/10/10

TITLE:

D-Sub HDD Straight DIP Type

MODEL CODE:

DS003-XXXXX

CHECK:


KEVIN

APPROVE:

TONY



誠州電子有限公司
Sincere State Electronics Co.,Ltd.



NO	DESCRIPTION	QTY
----	-------------	-----