
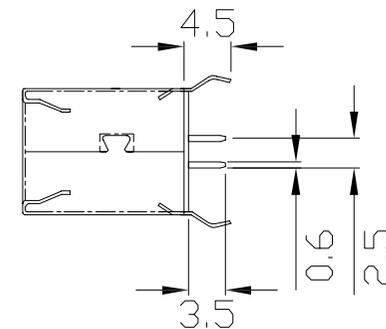
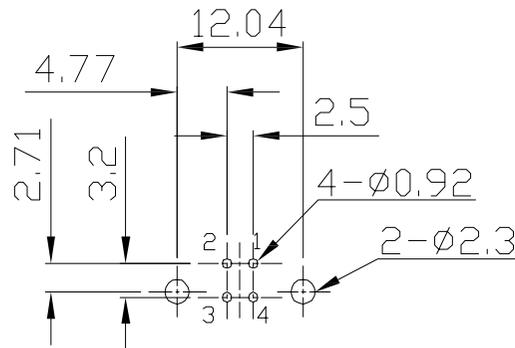
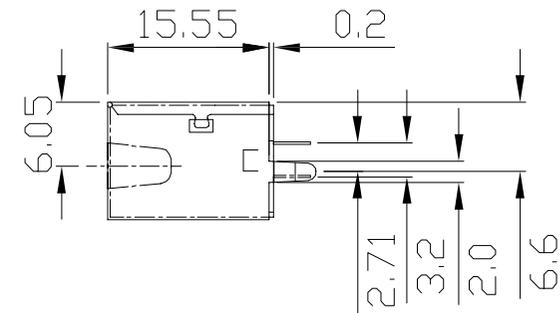


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

SPFCIFICATIONS

Current Rating:1.0A MAX
 Voltage rating:30V AC (rms)
 Insulator Resistance:100 Megohms min.
 Contact Resistance:30 m ohms max.
 Dielectric withstanding:DC 500V/minute
 Temperature Range:-40°C to +85°C
 Total Mating Force:3.57 kgf max
 Total Unmating Force:1.0 kgf min

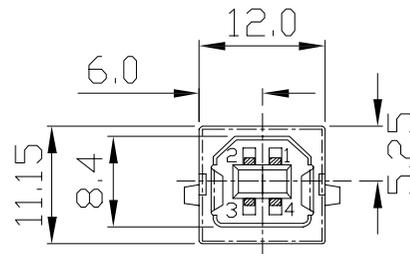

(COMPONENT SIDE)
PCB LAYOUT



U560 □ - □ □ □ □ □ - □ □ □

A: A Type
 B: B Type
 C: 1394
 D: MINI

No. OF PINS:

S10: Single port 90°
 S15: Single port 180°
 S20: Dual port 90°
 S30: SMT

Gold Thickness
 00: None
 03: 3u"
 05: 5u"
 10: 10u"

Plating Material
 G: Full Gold Plated
 T: Full Tin Plated
 P: Gold Plated & Tinned Tail



UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm METRIC X. = ±0.38 .X = ±0.25 .XX = ±0.13	DRAW: Chubby	DATE: 03/19/02	TITLE: USB B Type Straight Female
	CHECK: Kevin	APPROVE: Tony	MODEL CODE: U560B-04S15-XXX
			誠州電子有限公司 <i>Sincere State Electronics Co.,Ltd.</i>

NO	DESCRIPTION	QTY