

CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.
1.0			

### SPFCIFICATIONS

Current Rating:

1.0 Amp

Voltage Rating:

30V AC/DC

Insulator Resistance:

1000 M ohm min.

Contact Resistance:

20 m ohm max.

Dielectric withstanding:

AC 750V/minute

Operating Temperature:

-40°C to +105°C

Contact Material:

Phosphor Bronze

Insulator Material:

PBT UL94V-0






Finish:

Gold plated on contact area

Tin Plated on solder Tail

Shell: Copper Alloy

Shell Plating: Nickel Plated

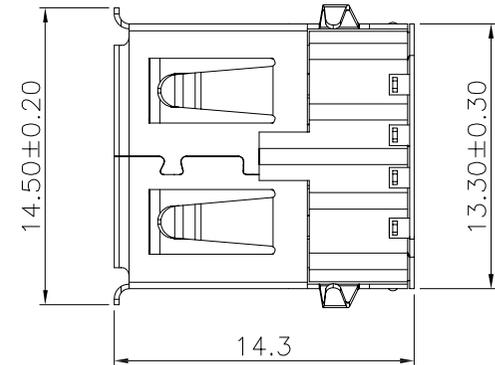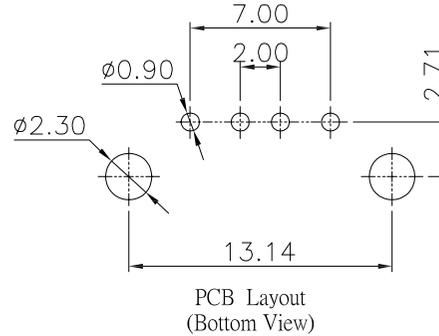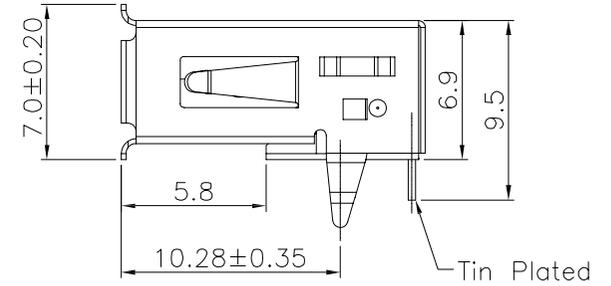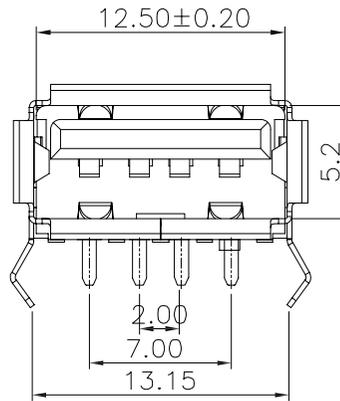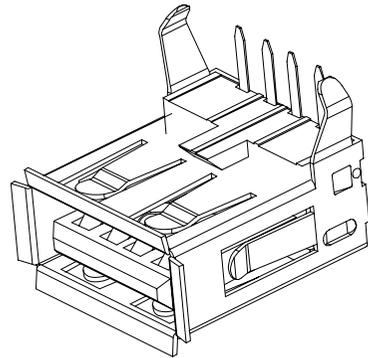

U560 □ - □ □ □ □ □ - □ □ □

A: A Type  
B: B Type  
C: 1394

No. OF PINS:

S10: Single port 90°  
S15: Single port 180°  
S20: Dual port 90°  
S30: SMT

Gold Thickness  
00: None  
03: 3u"  
05: 5u"  
10: 10u"

Plating Material  
G: Full Gold Plated  
T: Full Tin Plated  
P: Gold Plated & Tinned Tail

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC

.X = ±0.20  
.XX = ±0.15

DRAW:

Chubby

CHECK:

Kevin

DATE:

10/14/05

APPROVE:

TITLE:

USB A Female Right Angle Type

MODEL CODE:

U560A-04S10-XXX



誠州電子有限公司  
Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY
----	-------------	-----

