



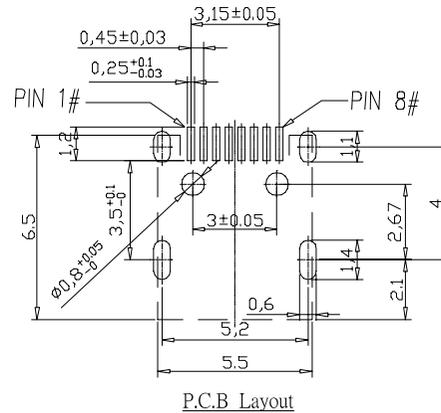


CUST. MODEL:	REF.
CUST. P/N	DWG FILE:

DESCRIPTION CONTROL			
REV.	DESC.	DATE	APP.

**SPFCIFICATIONS**

Ratings: AC 5V/0.5A  
 Courrent: 0.5mA  
 Insulator Resistance:100 m ohm min at DC 500V  
 Contact Resistance:50 m ohm or less  
 Dielectric withstanding:AC 100V/minute (CUT-OFF)  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: LCP UL94V-0 rated.  
 Shell: Brass/Gold flash  
 Contact Insertion Force: 35N(3.57kgf) max  
 Contact Withdrawal Force: 1N(0.1kgf) min

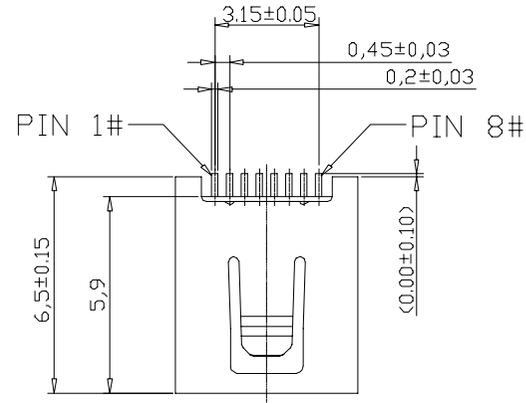

A: A Type  
 B: B Type  
 C: 1394  
 D: Mini

No. OF PINS:

S10: Single port 90°  
 S15: Single port 180°  
 S20: Dual port 90°  
 S30: SMT

Gold Thickness  
 00: None  
 03: 3u"  
 05: 5u"  
 10: 10u"

Plating Material  
 G: Full Gold Plated  
 T: Full Tin Plated  
 P: Gold Plated & Tinned Tail

UNLESS OTHERWISE SPECIFIED SURFACE FINISH ALL OVER TOLERANCES mm

METRIC


X. = ±0.38  
 .X = ±0.25  
 .XX = ±0.13

DRAW: Chubby  
 DATE: 04/28/07

CHECK: Kevin  
 APPROVE: Tony

TITLE: Mini USB 8P Female SMT Type

MODEL CODE: U560D-08S30-XXX



誠州電子有限公司  
 Sincere State Electronics Co.,Ltd.

NO	DESCRIPTION	QTY