
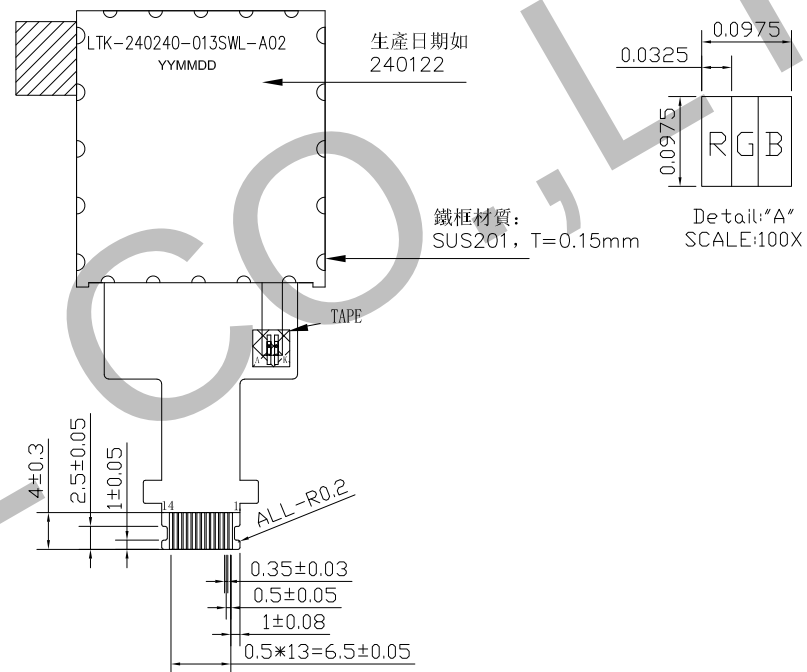
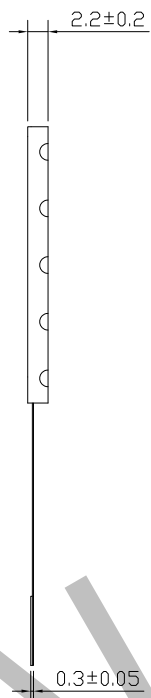


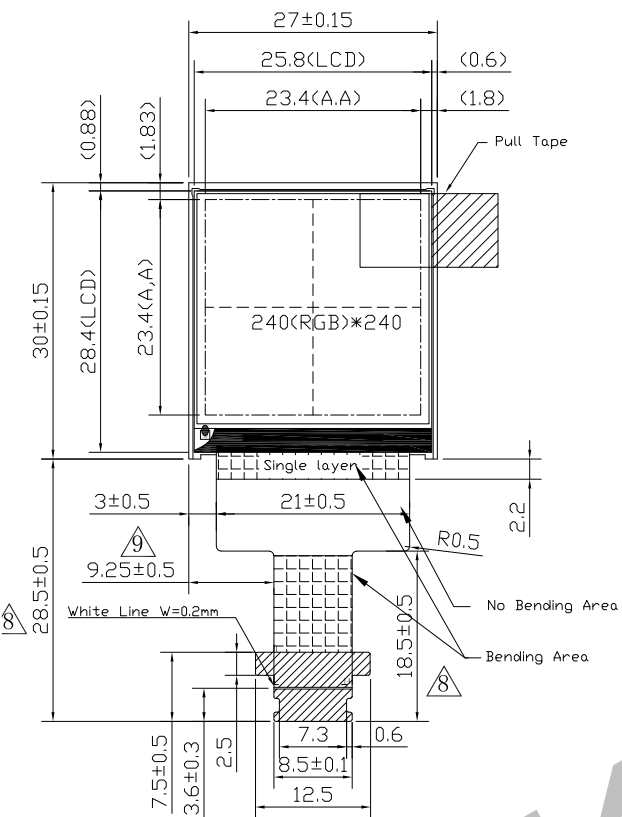

LCD MODULE FPC PIN OUT	
1	GND
2	LEDK
3	LEDA
4	VDD
5	GND
6	TE
7	D/C
8	CS
9	SCL
10	SDA
11	RST
12	GND
13	ID1(NC)
14	ID0(GND)

General specification

Item	specifications	Unit
Active screen size	1.3 inch Diagonal	-
Display resolution	240x RGB x 240	pixel
Module size (W x H x T)	27 ×30 ×2.2	mm
Active area (W x H)	23.4x23.4	mm
Pixel pitch (W×H)	0.0975 x 0.0975	mm
Interface	4-LINE SPI	-
Module weight	TBD±10%	g
Our components and processes are compliant to RoHS standard.		

Item	specifications
LCD type	a-Si TFT
LCD mode	Normally Black
Polarizer mode	Transmissive
Pixel arrangement	RGB-stripe
Backlight type	LED
Viewing direction(Gray inversion)	ALL

Interface pin

Pin No.	Symbol	Function
1	GND	Ground
2	LEDK	Backlight-
3	LEDA	Backlight+
4	VDD	Power supply for Analog circuits=2.75V.
5	GND	Ground
6	TE	Tearing effect signal.
7	D/C	Data / Control.
8	CS	Chip selection. Low enable.
9	SCL	Serial interface clock input.
10	SDA	Serial interface data input.
11	RST	Global reset pin. Active low to enter Reset State.
12	GND	Ground
13	ID1(NC)	Not Connect.
14	ID0(GND)	Ground