





正視圖

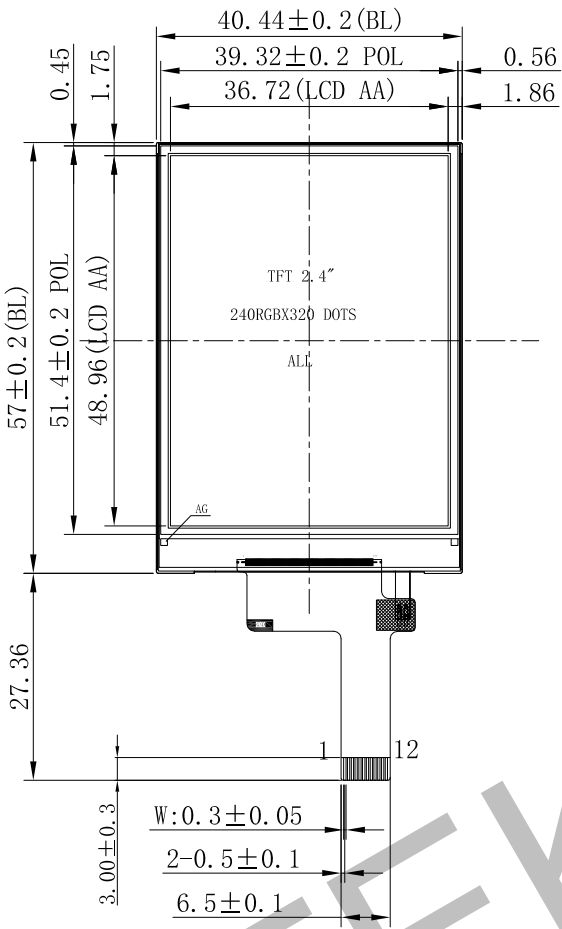

側視圖

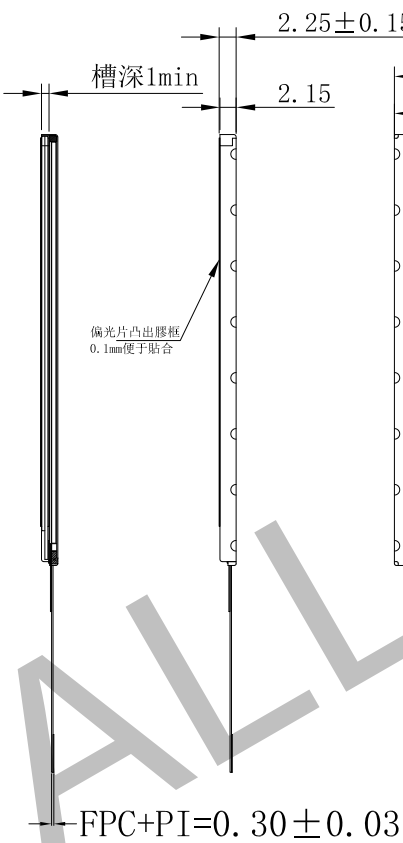

背視圖

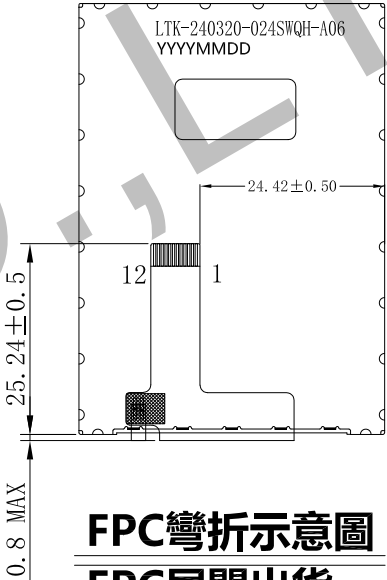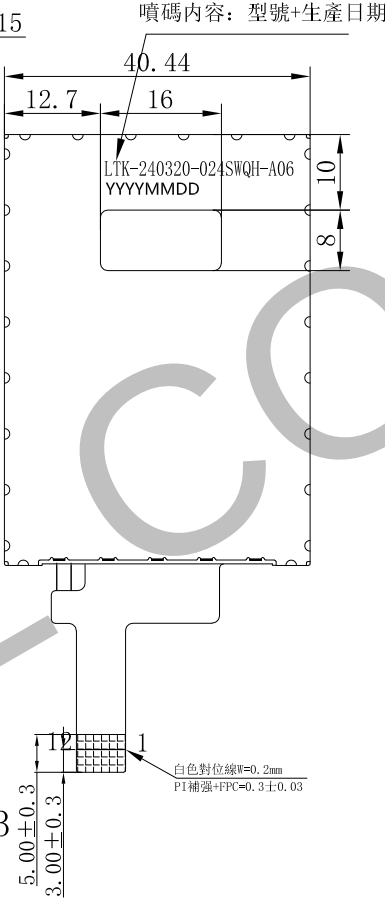

FPC彎折示意圖
FPC展開出貨

PIN SYMBOL	
1	K
2	A
3	GND
4	VDD
5	IOVCC
6	RS
7	SCL
8	CS
9	RESET
10	SDA
11	TE
12	GND

General specification

Item	specifications	Unit
Active screen size	2.4 inch Diagonal	-
Display resolution	240x RGB x 320	pixel
Module size (W x H x T)	40.44 ×57.00 ×2.25	mm
Active area (W x H)	36.72x48.96	mm
Pixel pitch (W×H)	0.153 x 0.153	mm
Interface	4-LINE SPI	-
Module weight	TBD±10%	g
Our components and processes are compliant to RoHS standard.		

Item	specifications
LCD type	a-Si TFT
LCD mode	Normally Black
Polarizer mode	Transmissive
Pixel arrangement	RGB-stripe
Backlight type	LED
Viewing direction(Gray inversion)	ALL

Interface pin

Pin No.	Symbol	Function
1	LEDK	Backlight-
2	LEDA	Backlight+
3	GND	Ground
4	VDD	Power supply for Analog circuits=3.0V
5	VDDI	Power Supply for LCD driver IC I/O System.
6	RS	This pin is used to select "Data or Command" in the parallel interface or serial data interface.
7	SCL	Serial interface clock input.
8	CSX	Chip selection. Low enable.
9	RESET	Global reset pin. Active low to enter Reset State.
10	SDA	Serial interface data input.
11	TE	Tearing effect signal.
12	GND	Ground