



Power Meter sensor

- Power usage measurement: Single phase or 3-phase
- Support 100A, 200A, 400A or 600A Current Transform
- Support up to 4 channels 3-phase
- Report status: Voltage, Current, Energy, Power, PF.

Commercial building Residential Building
Hotel Hospital Reconstruction Projects



BLE to NB-IoT/LoRa Hub

- Support up to 20 BLE devices
- DC Power with backup battery

Hub for BLE to NB-IoT or LoRaWAN



nano S Temperature/Humidity Sensor

- Temperature range: -20°C to 60°C (+/-0.3°C)
- Humidity: 10% - 100%RH (+/-3%)
- Up to 2 years battery life
- Industrial smallest form factor for easy installation
- Work with SENS08 BLE to NB-IoT / LoRa Hub


Cold chain Wine Cabinet Horticulture system
Hospital School



nano S-P Proximity Sensor

- Measuring range: up to 20cm
- Up to 2 years battery life
- Small form factor for easy installation
- Work with SENS08 BLE to NB-IoT / LoRa Hub


Smart Toilet Smart Office Security Warehouse



nano S-D Occupancy Sensor

- Long measuring range: up to 4m
- Narrow viewing angle: 27 degree
- Fast Response
- Up to 2 years battery life
- Work with SENS08 BLE to NB-IoT / LoRa Hub

Smart Toilet Smart Office Security Warehouse

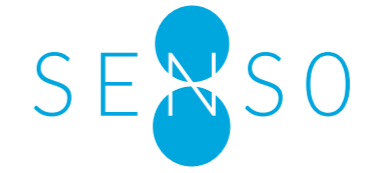

www.SENS08.com

WIRELESS IoT SENSOR for SMART BUILDING APPLICATION



NB-IoT



LoRa



www.SENS08.com

CONTACT US

Arwin Technology Limited
Unit 541B, 5/F, Building 1W,
1 Science Park West Avenue,
Hong Kong Science Park,
NT, Hong Kong

+852 2346 8818

sales@senso8.com

www.senso8.com

FOR MORE INFO



Arwin Technology Limited

SENSO8 INDOOR AIR QUALITY SENSOR

General Environment



Car Park



Toilet



Temp.

PM2.5

CO₂

NH₃

CO

Humidity

TVOC

HCHO

H₂S

NO₂

KEY FEATURES

- Battery or DC Power
- Support LoRa or NB-IoT wireless connectivity
- RGB bar for AQI level indication
- Configurable settings: measurement interval and alert thresholds
- 3-year battery life (not include PM2.5)
- Complaint with WELL standard

SENSO8 SENSOR FOR SMART BUILDING APPLICATION




2-Pin Water Leakage Sensor

- 0 – 100 measurement resolution
- Point type with cable break detection
- Alert threshold and heartbeat configurable
- Battery operation
- >10 years battery life

Data center subfloors HVAC equipment

Water pipes Smart toilets

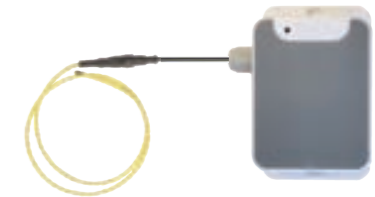

Water Rope Sensor

- 0 – 100 measurement resolution
- Cable break detection
- Alert threshold and heartbeat configurable
- Battery operation
- >10 years battery life

Data center subfloors HVAC equipment

Water pipes Smart toilets



Ambient Temperature/ Humidity Sensor

- Temperature range: -20°C to 60°C (+/-0.3°C)
- Humidity: 10% - 100% RH (+/-3%)
- Alert threshold and heartbeat configurable
- Battery operation
- > 10 years battery life

Cold room Refrigerator Medical laboratory

Server equipment Commercial building



PT100 Temperature sensor

- Wide temperature range: -100°C to 300°C
- Support Air and Liquid Temperature probe
- Alert threshold and heartbeat configurable
- 1m to 5m long external probe
- > 10 years battery life

Cold room Refrigerator Medical laboratory

Server room



Dry Contact (Open/Close) sensor

- NC / NO detection
- Heartbeat configurable
- Battery operation
- >10 years battery life

Commercial building Residential Building

Construction site Railway



Occupancy Sensor

- Long detecting range: up to 4m
- Narrow viewing angle: 27 degree
- Alert threshold and heartbeat configurable
- Fast Response
- >4 years battery life

Smart Toilet Smart Office Security Warehouse



Ultrasonic Sensor

- Long detecting range: up to 4m
- Typical full field of view: 60 degree
- Fast response
- Alert threshold and heartbeat configurable
- >7 years battery life

Smart Toilet Smart Office Security Warehouse



Dry Contact OUTPUT Sensor

- NC / NO output control by IoT Platform
- Input option: Dual dry contact, RS485 or PT100 temperature sensor
- Built-in backup battery

Commercial building Residential Building